


Internal Moulded Doors



DIF45** 6 Panel Grained FD30 35mm Thick

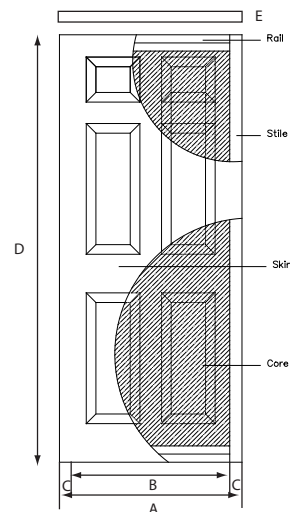

Dimensions				
Door Width	2'3"	2'6"	2'9"	2'8"
Product Code	DIF4540	DIF4560	DIF4570	DIF4580
Building Regulations	F, FD	F, FD	F, FD, M	F, FD
Weights (kg)	26	29	32	32
Dim A (mm)	686	762	838	813
Dim B (mm)	630	706	782	757
Dim C (mm)	28	28	28	28
Dim D (mm)	1981	1981	1981	2032
Dim E (mm)	35	35	35	35

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access

Fire Doors (FD)

(F) - Forest Stewardship Council

Lock Block

None



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Moulded Doors

General Construction

This popular 6 panel grained design will suit a variety of interiors. This new 35mm internal moulded fire door has 30-minute fire ratings to meet the regulations, and it is only 35mm thick. That means it can be used with existing frames and linings.

Construction

Constructed using a softwood timber stile and rail frame, with particle board and cellulose composite sandwich . Butt jointed timber stiles and rails with a wood fibre skin.

Timber Specification

Timber Species	Softwood
Moisture Content	8-14%
Moulded Skin	3mm Moulded wood fibre

Maximum Trim

The top of the door must not be trimmed, however the sides can be trimmed by up to 4mm with 6mm off the bottom edge.

Fire Certificate: Available on Request

Glazing Certificate: Not Applicable

