


Internal Moulded Doors



DIF18** 4 Panel Smooth FD30

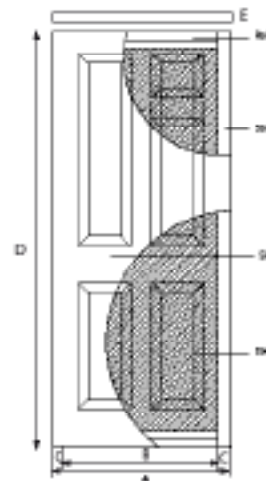

	Dimensions				
Door Width	2'0"	2'3"	2'6"	2'9"	2'8"
Product Code	DIF1830	DIF1840	DIF1860	DIF1870	DIF1880
Building Regulations	P, FD	P, FD	P, FD	P, FD, M	P, FD
Weights (kg)	24	27	30	33	32
Dim A (mm)	610	686	762	838	813
Dim B (mm)	516	592	668	744	719
Dim C (mm)	47	47	47	47	47
Dim D (mm)	1981	1981	1981	1981	1981
Dim E (mm)	44	44	44	44	44

Lock Block
None. None. Lockblock can be fitted either hanging side due to solid flaxboard core.

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access

Fire Doors (FD)

(P) - Programme for the Endorsement of Forest Certification



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Moulded Doors

General Construction

The understated style makes it suitable for many kinds of interiors and the elegant proportions work well with most hardware.

Construction

Constructed using a softwood timber stile and rail frame, with routed flaxboard Core.

Timber Specification

Timber Species	Softwood
Moisture Content	8-12%
Moulded Skin	3 mm thick die-formed fibreboard
Core	38 mm routed flaxboard

Maximum Trim

3 mm from each vertical edge, maximum of 5 mm off the bottom of the door. The top of the door must not be trimmed.

Fire Certificate: Available on Request


Glazing Certificate: Not Applicable



Internal Moulded Doors



DIC16** 4 Panel Smooth

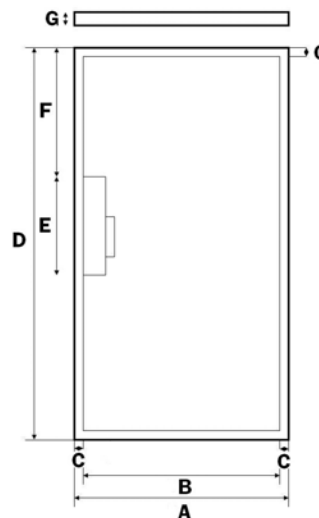

Pre-trim sizes

Dimensions							
Door Width	1'6"	1'9"	2'0"	2'3"	2'6"	2'8"	2'9"
Product Code	DIC1610	DIC1620	DIC1630	DIC1640	DIC1660	DIC1680	DIC1670
Building Regulations	F	F	F	F	F	F	F, M
Weights (kg)	8.5	9.5	10.5	11.5	12.5	13.5	13.5
Dim A (mm)	457	533	610	686	762	813	838
Dim B (mm)	401	477	554	630	706	757	782
Dim C (mm)	28	28	28	28	28	28	28
Dim D (mm)	1981	1981	1981	1981	1981	2032	1981
Dim E (mm)	360	360	360	360	360	360	360
Dim F (mm)	880	880	880	880	880	880	880
Dim G (mm)	35	35	35	35	35	35	35

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access

(F) - Forest Stewardship Council

Lock Block

1 Particleboard @ 28.3/ 34 65x360



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Moulded Doors

General Construction

The understated style makes it suitable for many kinds of interiors and the elegant proportions work well with most hardware.

Construction

Constructed using a wider whitewood timber stile and rail frame , with a cellular paper core. Assembled using high density moulded fibre-board skins and UF glue.

Timber Specification

Timber Species	Softwood
Timber Grade	Softwood sawfalling grade
Moisture Content	8-12%
Moulded Skin	3mm Hardboard
Core	Cellular Paper Core

Fire Certificate: Not Applicable

Glazing Certificate: Not Applicable

