


Internal Softwood Doors

DIC49** Hemlock Downham

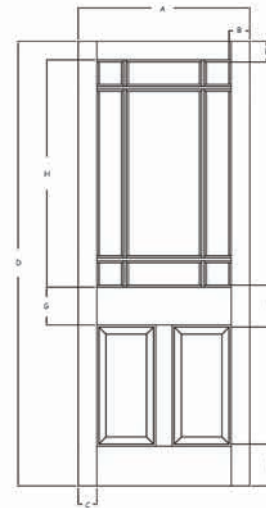

Dimensions		
Door Width	2'6"	2'9"
Product Code	DIC4960	DIC4970
Building Regulations	P	P, M
Weights (kg)	25	26
Dim A (mm)	762	838
Dim B (mm)	95	95
Dim C (mm)	82.5	82.5
Dim D (mm)	1981	1981
Dim E (mm)	190	190
Dim F (mm)	188	188
Dim G (mm)	158	158
Dim H (mm)	1020	1020

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access

(P) - Programme for the Endorsement of Forest Certification



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Softwood Doors

General Construction

A distinctive nine light configuration with two panels below, makes this door particularly effective in contemporary interiors.

Construction

Constructed using solid timber stub Mortice and Tenon.
Supplied unglazed.

Timber Specification

Timber Species	Hemlock Clear
Moisture Content	10-12%

Fire Certificate: Not Applicable

Glazing Certificate: Not Applicable

