



Internal Hardwood Doors

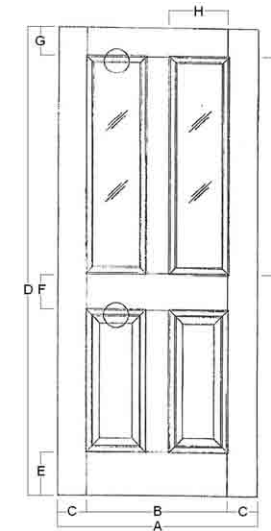

DIE41**/ DIE45** 4 Panel Oak 2 Light Glazed

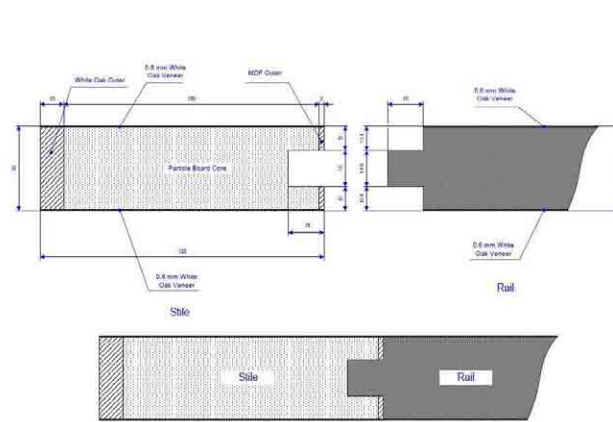

Dimensions					
Door Width	2'3"	2'6"	2'9"	726mm	826mm
Product Code	DIE4140	DIE4160	DIE4170	DIE4570	DIE4580
Building Regulations			M		M
Weights (kg)	27.5	28.5	30.5	28	30
Dim A (mm)	686	762	838	726	826
Dim B (mm)	446	522	598	486	586
Dim C (mm)	120	120	120	120	120
Dim D (mm)	1981	1981	1981	2040	2040
Dim E (mm)	185	185	185	185	185
Dim F (mm)	160	160	160	160	160
Dim G (mm)	120	120	120	120	120
Dim H (mm)	170.5	208.5	246.5	190.5	240.5
Dim I (mm)	926	926	926	985	985

All sizes subject to standard industry tolerances
Part M Doors (M) - Mobility and Access



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Hardwood Doors

General Construction

A simple four panel design with solid oak bolection mouldings.

Construction

Constructed using veneered particleboard stiles and rails frame.

0.6mm American White Oak Veneer.

Supplied pre-glazed with 5mm clear toughened bevelled glass (with paint and peel film).

Timber Specification

Timber Species American White Oak

Moisture Content 10 - 14%

Lipping

10mm white oak lippings applied on each stile

Maximum Trim

If the door is to be reduced in size, an equal amount of timber should be cut down from either side/top or bottom (please note that this must never exceed 10mm in total, 5mm each side).

Fire Certificate: Not Applicable

Glazing Certificate: Available on request

