



Internal Hardwood Doors

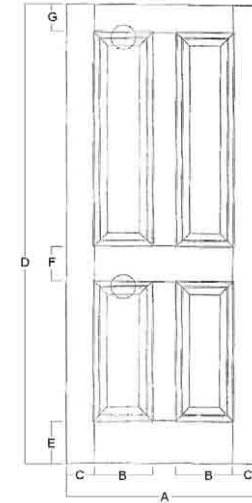

DIE40**/ DIE44** 4 Panel Oak

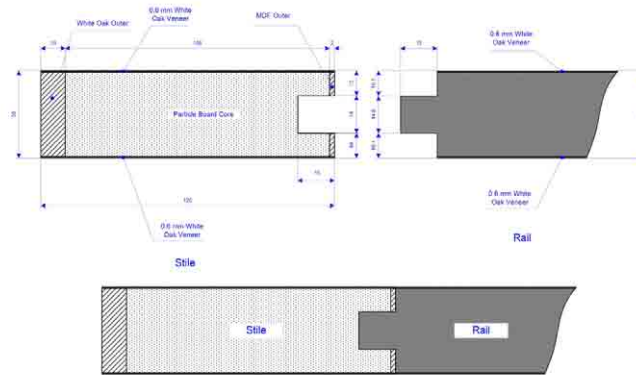

Dimensions								
Door Width	2'0"	2'3"	2'6"	2'9"	626	726	826	926
Product Code	DIE4030	DIE4040	DIE4060	DIE4070	DIE4460	DIE4470	DIE4480	DIE4490
Building Regulations				M			M	M
Weights (kg)	25	27	28	30	26	29	30	34
Dim A (mm)	610	686	762	838	626	726	826	926
Dim B (mm)	132.5	170.5	208.5	246.5	140.5	190.5	240.5	290.5
Dim C (mm)	120	120	120	120	120	120	120	120
Dim D (mm)	1981	1981	1981	1981	2040	2040	2040	2040
Dim E (mm)	185	185	185	185	185	185	185	185
Dim F (mm)	160	160	160	160	160	160	160	160
Dim G (mm)	120	120	120	120	120	120	120	120

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Hardwood Doors

General Construction

The solid oak bolection mouldings and sturdy construction reflect this door's superior quality.

Construction

Constructed using veneered particleboard stiles and rails frame
0.6mm American White Oak Veneer.

Timber Specification

Timber Species	American White Oak
Moisture Content	10 - 14%

Lipping

10mm white oak lippings applied on each stile

Maximum Trim

If the door is to be reduced in size, an equal amount of timber should be cut down from either side/top or bottom (please note that this must never exceed 10mm in total, 5mm each side).

Fire Certificate: Not Applicable

Glazing Certificate: Not Applicable

