


Internal Flush Doors

DIF42*** One Panel Inlaid Oak Veneer FD30

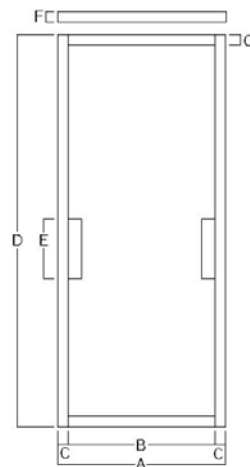

Dimensions			
Door Width	2'3"	2'6"	2'9"
SKU Code	DIF4240	DIF4260	DIF4270
Building Regulations	P, FD	P, FD	P, FD, M
Weights (kg)	35.5	37.5	39
Dim A (mm)	686	762	838
Dim B (mm)	436	512	588
Dim C (mm)	125	125	125
Dim D (mm)	1981	1981	1981
Dim E (mm)	N/A	N/A	N/A
Dim F (mm)	44	44	44

Lock Block
None

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access

Fire Doors (FD)

(P) - Programme for the Endorsement of Forest Certification



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Flush Doors

General Construction

This innovation in flush door design is faced with panel effect veneers, inlaid with real wood. The timber edge lipping is a distinctive feature and the whole piece is fully finished with a hardwearing lacquer to give a smooth surface.

Construction

Softwood rail and stile MDF construction, with a low density particle board core and 3mm fibreboard skin.
0.5mm American White oak veneer.

Timber Specification

Timber Species	Softwood
Timber Grade	Sawfalling Grade
Moisture Content	7-13%
Core	Low Density Particleboard Core

Lipping

9mm hardwood are applied to each vertical edge.

Fire Certificate: Available on request


Glazing Certificate: Not Applicable



Internal Flush Doors



DIC42** 1 Panel Inlaid Oak Veneer

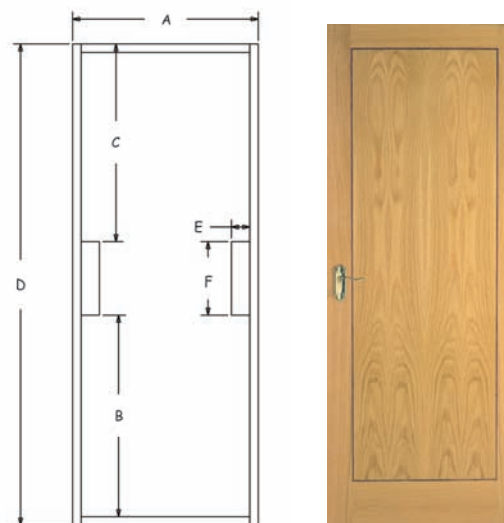

Dimensions				
Door Width	2'0"	2'3"	2'6"	2'9"
SKU Code	DIC4230	DIC4240	DIC4260	DIC4270
Building Regulations				M
Weights (kg)	15.5	17.5	19.5	21.5
Dim A (mm)	610	686	762	838
Dim B (mm)	831	831	831	831
Dim C (mm)	815	815	815	815
Dim D (mm)	1981	1981	1981	1981
Dim E (mm)	75	75	75	75
Dim F (mm)	300	300	300	300

Lock Block
Lock block 300mm x75mm on both sides.

All sizes subject to standard industry tolerances



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Flush Doors

General Construction

This flush door design is faced with panel effect veneers, inlaid with real walnut.

Construction

Constructed using softwood timber or MDF stiles and rails frame. Fully face lacquered with walnut inlay

Timber Specification

Timber Species	Softwood
Moisture Content	8-12%
Core	Honeycomb paper core

Lipping

9mm hardwood are applied to each vertical edge.

Fire Certificate: Not Applicable

Glazing Certificate: Not Applicable

