


Internal Flush Doors



DIC34**/ DIC35** Ash Veneer

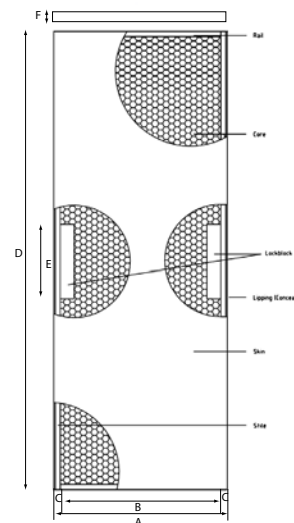

	Dimensions						
Door Width	2'0"	2'3"	2'6"	2'9"	726	826	926
SKU Code	DIC3430	DIC3440	DIC3460	DIC3470	DIC3530	DIC3540	DIC3550
Building Regulations				M		M	M
Weights (kg)	10	11	12	14	12	14	16
Dim A (mm)	610	686	762	838	726	826	926
Dim B (mm)	564	640	716	792	680	780	880
Dim C (mm)	23	23	23	23	23	23	23
Dim D (mm)	1981	1981	1981	1981	2040	2040	2040
Dim E (mm)	320	320	320	320	320	320	320
Dim G (mm)	35	35	35	35	40	40	40

Lock Block
 @ 320 x 60 located at the centre point of every door when measured from the height.

All sizes subject to standard industry tolerances
 Part M Doors (M) - Mobility and Access



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Flush Doors

General Construction

High quality, natural timber veneer and concealed timber lippings make this door a smart choice for many types of interior. Supplied with a factory applied lacquer.

Construction

Butt jointed and glued timber stile and rail construction and white ash veneered.

Timber Specification

Timber Species	Picea Abies
Timber Grade	Standard
Moisture Content	8-14%
Core	Honeycomb paper core

Lipping

6mm matching hardwood edge lippings are applied.

Fire Certificate: Not Applicable


Glazing Certificate: Not Applicable



Internal Flush Doors



DIF07**/ DIF02** Ash Veneer FD30

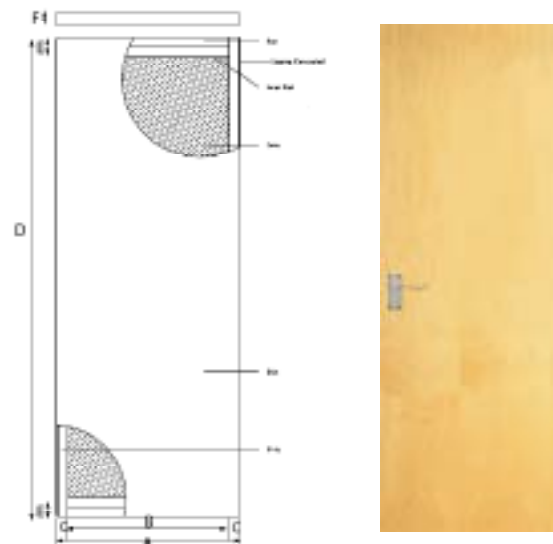

Dimensions							
Door Width	2'0"	2'3"	2'6"	2'9"	726	826	926
SKU Code	DIF0730	DIF0740	DIF0760	DIF0770	DIF0230	DIF0240	DIF0250
Building Regulations	FD	FD	FD	FD, M	FD	FD, M	FD, M
Weights (kg)	24	27	30	33	28	33	38
Dim A (mm)	610	686	762	838	726	826	926
Dim B (mm)	526	602	678	754	642	742	842
Dim C (mm)	42	42	42	42	42	42	42
Dim D (mm)	1981	1981	1981	1981	2040	2040	2040
Dim E (mm)	72	72	72	72	72	72	72
Dim F (mm)	44	44	44	44	44	44	44

Lock Block
None

All sizes subject to standard industry tolerances
 Part M Doors (M) - Mobility and Access
 Fire Doors (FD)



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Flush Doors

General Construction

High quality, natural timber veneer and concealed timber lippings make this door a smart choice for many types of interior. Supplied with a factory applied lacquer.

Construction

Butt jointed and glued timber stile and rail construction with high density chipboard skin and white ash veneered.

Timber Specification

Timber Species	Picea Abies
Timber Grade	Standard
Moisture Content	8-12%
Core	One piece tubeboard core

Lipping

6mm matching hardwood edge lippings are applied.

Fire Certificate: Not Applicable

Glazing Certificate: Not Applicable

