


Internal Flush Doors



DIC11** Hardboard Unlipped Primed

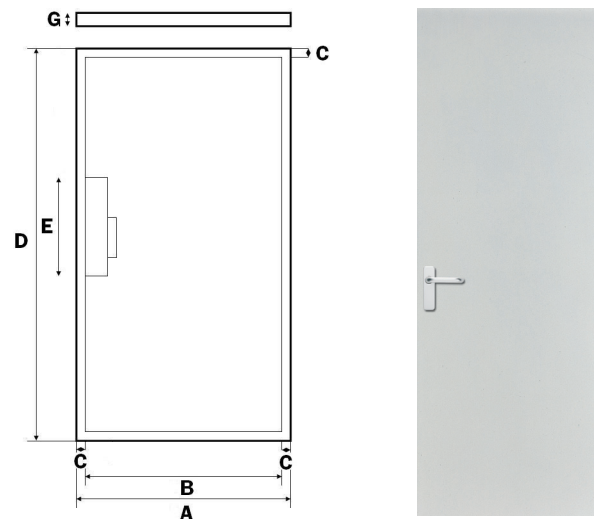

| Dimensions | | | | | | | | |
|----------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Door Width | 1'3" | 1'6" | 1'9" | 2'0" | 2'3" | 2'4" | 2'6" | 2'9" |
| SKU Code | DIC1100 | DIC1110 | DIC1120 | DIC1130 | DIC1140 | DIC1150 | DIC1160 | DIC1170 |
| Building Regulations | | | | | | | | M |
| Weights (kg) | 4 | 5 | 5 | 6 | 6 | 7 | 7 | 8 |
| Dim A (mm) | 381 | 457 | 533 | 610 | 686 | 711 | 762 | 838 |
| Dim B (mm) | 335 | 411 | 487 | 564 | 640 | 665 | 716 | 792 |
| Dim C (mm) | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 |
| Dim D (mm) | 1981 | 1981 | 1981 | 1981 | 1981 | 1981 | 1981 | 1981 |
| Dim E (mm) | 320 | 320 | 320 | 320 | 320 | 320 | 320 | 320 |
| Dim G (mm) | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access

Lock Block

@ 320 x 60 located at the centre point of every door when measured from the height.



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Flush Doors

General Construction

This door has a primed hardboard finish ready to paint in any colour or style.

Construction

Butt jointed and glued timber stile and rail construction with white primed hardboard skin.

Timber Specification

| | |
|------------------|----------------------|
| Timber Species | Picea Abies |
| Timber Grade | Standard |
| Moisture Content | 8-14% |
| Core | Honeycomb Paper Core |

Lipping

This door is sold unlipped

Fire Certificate: Not Applicable

Glazing Certificate: Not Applicable

