


External Softwood Doors

DXT01** 2XG / 2XGG Hemlock

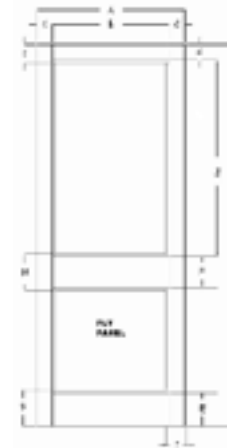

Dimensions			
Door Width	2'6"	2'9"	2'8"
Product Code	DXT0160	DXT0170	DXT0180
Building Regulations	P	P, M	P
Weights kg	TBC	TBC	TBC
Dim A (mm)	762	838	813
Dim B (mm)	602	678	653
Dim C (mm)	80	80	80
Dim D (mm)	1981	1981	1981
Dim E (mm)	175	175	175
Dim F (mm)	158	158	158
Dim G (mm)	190	190	190
Dim H (mm)	188	188	188
Dim I (mm)	95	95	95
Dim J (mm)	1020	1020	1071

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access

(P) - Programme for the Endorsement of Forest Certification



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

External Softwood Doors

General Construction

This simple, functional door admits plenty of light and is easy to clean. It has a loose-pinned bottom panel that offers the option of a glass replacement.

Construction

Constructed using solid timber stub Mortice and Tenon. Panels consist of 6 mm B/BB plywood.
Door is treated to prevent fungal decay.

Timber Specification

Timber Species	Hemlock Clear
Moisture Content	14 -18%


Fire Certificate: Not Applicable

Glazing Certificate: Available on Request



External Softwood Doors

DXC01** 2XG / 2XGG Redwood

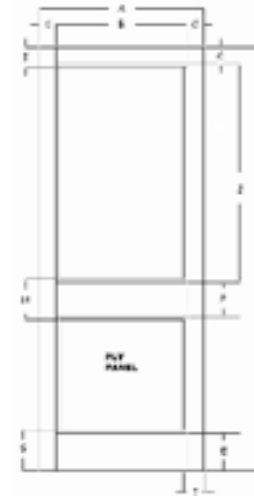

Dimensions			
Door Width	2'6"	2'9"	2'8"
Product Code	DXC0160	DXC0170	DXC0180
Building Regulations	F	F, M	F
Weights kg	TBC	TBC	TBC
Dim A (mm)	762	838	813
Dim B (mm)	602	678	653
Dim C (mm)	80	80	80
Dim D (mm)	1981	1981	1981
Dim E (mm)	175	175	175
Dim F (mm)	158	158	158
Dim G (mm)	190	190	190
Dim H (mm)	188	188	188
Dim I (mm)	95	95	95
Dim J (mm)	1020	1020	1071

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access

(F) - Forest Stewardship Council



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

External Softwood Doors

General Construction

This simple, functional door admits plenty of light and is easy to clean. It has a loose-pinned bottom panel that offers the option of a glass replacement.

Construction

Constructed using solid timber stub Mortice and Tenon. Panels consist of 6 mm B/BB plywood.
Door is treated to prevent fungal decay.

Timber Specification

Timber Species	Redwood
Moisture Content	14 -18%

Fire Certificate: Not Applicable

Glazing Certificate: Available on Request

