


# External Flush Doors

## DXF00\*\* Solid Core Blank Lightweight

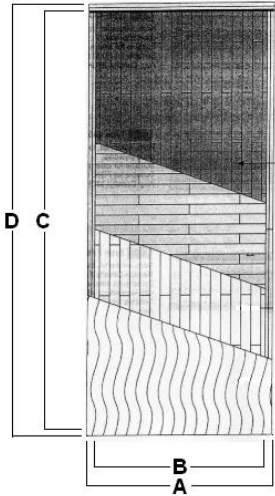

	Dimensions		
Door Width	3'0"	3'0"	4'0"
Product Code	DXF0041	DXF0044	DXF0053
Building Regulations	M, L, FD30	M, L, FD60	M, L, FD30
Weights kg	34	47	50
Dim A (mm)	915	915	1220
Dim B (mm)	855	855	1160
Dim C (mm)	2075	2075	2335
Dim D (mm)	2135	2135	2440

All sizes subject to standard industry tolerances  
 Part L Doors (L) - Warmth & Insulation suitable for new build  
 Part M Doors (M) - Mobility and Access  
 Fire Doors (FD)

# External Flush Doors

## General Construction

---

This plywood faced fire door is extremely versatile and can be customised to create something unique. You can cut the blank to size, make apertures in accordance with specific guidelines, and add veneers or other finishes.

### Construction

Constructed using three layers of laminate core.  
Suitable for paint finishes.  
The door can be cut to size (do not trim the top)

### Timber Specification

Timber Species	Mixwood Tropical Hardwood
Moisture Content	Max 15%
Core	Three Layer Laminate


Fire Certificate: Available on request

Glazing Certificate: Not Applicable



# External Flush Doors

## DXF05\*\* Solid Core Blank Lightweight

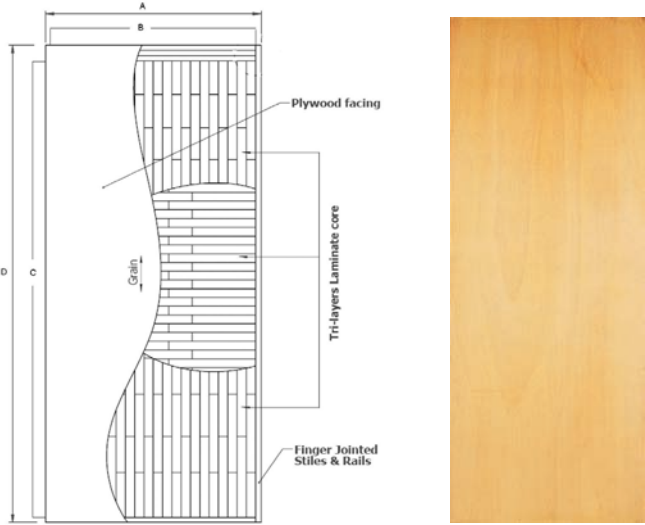

	Dimensions		
Door Width	3'0"	3'0"	4'0"
Product Code	DXF0541	DXF0544	DXF0553
Building Regulations	M, L, FD30	M, L, FD60	M, L, FD30
Weights kg	35	55	53
Dim A (mm)	915	915	1220
Dim B (mm)	871	871	1176
Dim C (mm)	2063	2043	2368
Dim D (mm)	2135	2135	2440

All sizes subject to standard industry tolerances  
 Part L Doors (L) - Warmth & Insulation suitable for new build  
 Part M Doors (M) - Mobility and Access  
 Fire Doors (FD)

# External Flush Doors

## General Construction

---

This plywood faced fire door is extremely versatile and can be customised to create something unique. You can cut the blank to size, make apertures in accordance with specific guidelines, and add veneers or other finishes.

### Construction

Constructed using three layers of laminate core.  
Joints of stiles and rails are glued and stapled.  
Suitable for paint finishes.  
The door can be cut to size (do not trim the top)

### Timber Specification

Timber Species	Mixwood Tropical Hardwood
Moisture Content	8-10%
Core	Three Layer Laminate

Fire Certificate: Available on request

Glazing Certificate: Not Applicable

