

K 7733 E

Built-in refrigerator
with DynaCool and LED lighting for practical food storage.



- Spacious drawer with moisture control – DailyFresh
- Optimum and maintenance-free LED lighting in compartment
- Uniform temperature distribution inside the appliance – DynaCool
- Dishwasher-proof door shelves – ComfortClean
- More space inside for bulky items – ComfortSize



EAN: 4002516413080 / material number: 11729580

Appliance category	
Refrigerator	•
Construction type	
Built-in appliance	•
Integrated appliance	•
Door hinge	right
Convertible door hinging	•
Design	
Refrigeration section lighting	LED
User convenience	
Networking with Miele@home	•
Freshness system	DailyFresh
ComfortClean	•
DynaCool	•
ComfortSize	•
SoftClose, can be retrofitted	•
Controls	
Operating concept	SensorTouch
Automatic SuperCool	•
No. of temperature zones	1
Sabbath mode	•
Party mode	•
Holiday mode	•
Fridge/Fridge section	
No. of shelves	7
Chrome-plated metal bottle rack	•
No. of crisper drawers	2
Number of door shelves for jars	3
Door rack for bottles	2
Door shelves	5
Efficiency and sustainability	
Energy efficiency class (A–G)	E
Annual energy consumption in kWh	114,30
Energy consumption in 24 h in kWh	0,312
Safety	
Lock function	•
Acoustic door alarm	•
Optical door alarm	•

K 7733 E


Built-in refrigerator
with DynaCool and LED lighting for practical food storage.



Technical data	
Niche width in mm	560
Niche height in mm	1,772
Niche depth in mm	550
Appliance width in mm	559
Appliance height in mm	1,770
Appliance depth in mm	544
Weight in kg	54.50
Door hinge technology	Fixed door
Max. door front weight – refrigerator, in kg	26
Climate class	SN-T
Refrigerator compartment in l	309
Noise class (A–D)	B
Sound power in dB(A) re1pW	35
Current consumption (mA)	1,200
Voltage in V	220-240
Fuse rating in A	13
Length of supply lead in m	2.2
Standard accessories	
Egg tray	•


K 7733 E

Built-in refrigerator
with DynaCool and LED lighting for practical food storage.

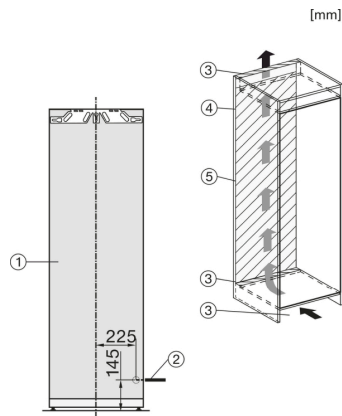


K7733E, K7763E, K7732E, K7734F, K7764E, K7743E, 7744E, K7773D, K7774D (footnote*) (installation drawings)

- *1. View from the front
- 2. Mains connection cable, L = 2100 mm
- 3. Ventilation cut-out min. 200 cm²
- 4. Ventilation
- 5. No connections permitted in this area

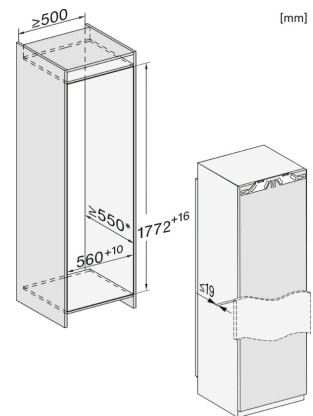

K7733E, K7763E, K7732E, K7734F, K7764E, K7743E, K7744E, K7773D, K7774D, built-in (footnote*) (installation drawings)

*The declared energy consumption was calculated in a 560 mm deep niche. The appliance is fully functional in a 550 mm niche but the energy consumption will be slightly higher.

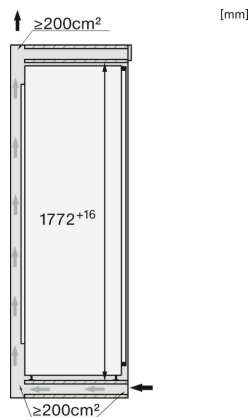

K7733E, K7763E, K7732E, K7734F, K7764E, K7743E, K7744E, K7773D, K7774D, side view (installation drawings)