


size: L1254mm x W195mm x H50mm



SDH3690
TIMELESS OAK
RIGID LUXURY VINYL
Wear Layer 0.55mm
10 pcs = 2.2 m²

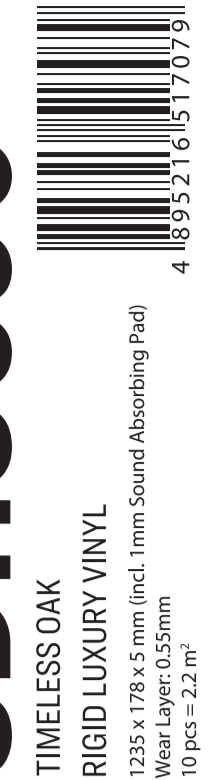

SDH3690
TIMELESS OAK
RIGID LUXURY VINYL
Wear Layer 0.55mm
10 pcs = 2.2 m²



Scan this QR code to find full fitting instructions

1235mm x 178mm x 5mm
10 panels per pack
Coverage 2.2m²
Pack weight: 18.36kg



OAKE & GRAY

BEAUTIFUL FLOORING IN A SINGLE CLICK

RIGID LUXURY VINYL with underlay

IMPORTANT VINYL FLOORING FITTING NOTICE

- Fitting method for this product is unique and laying instructions must be followed. Store packs in a room with a minimum temperature of 20°C - 25°C.
- Do not open packs until you are ready to install the flooring and mix/shuffle panels from different packs when installing.
- Subfloor must be flat, smooth, clean, and dry. (Do not install in areas with high flooding risk such as saunas or outdoors).
- Use spacers to create the required expansion gap (6mm) around the edge of the room and all fixed objects including door frames, radiator pipes and cabinet legs.
- Do not install kitchen cabinets on top of the flooring.
- All joints should be tapped in to place using a rubber mallet and an off-cut piece of flooring (tapping block). No gaps should be visible.
- Ensure each row is checked for straightness before starting the following row.
- Short joints should be a minimum of 200mm apart from the short-end joint on the previous row.
- Use a straight edge to score the plank several times (decor facing upwards) then snap for a clean break.

PRE-INSTALLATION

CLEAN THE SUB-FLOOR

- SMOOTH
- CLEAN
- DRY
- SOUND

CHECK SUB-FLOOR MOISTURE CONTENT

MINERAL BASED	TIMBER BASED
<ul style="list-style-type: none"> ✓ DPM ✓ CONCRETE ✓ GEMENT SCREENS ✓ KNEEWHITE 	<ul style="list-style-type: none"> ✗ 8-12% moisture content ✗ DPM ✓ Breathable moisture barrier (ie. Bitumen moisture barrier paper can be used) ✓ FLOORBOARDS ✓ CHIPBOARD ✓ PLYWOOD

NOTE: Additional expansion gap required for runs longer than 20m (or areas exceeding 400m²) in the form of a threshold strip

UNDERFLOOR HEATING: Water and electric* systems can be used

GRADUALLY INCREASE THE TEMPERATURE BY 5° PER DAY UP TO A MAX OF 30°

SEEK ADVICE FROM UNDERFLOOR HEATING MANUFACTURER

INSTALLATION (not suitable for external installation)

TOOLS REQUIRES

- CHOOSE DIRECTION OF INSTALLATION**
Calculate the room surface prior to installation. Plan for an extra 5-10% for waste.
- FIRST ROW**
Adjust width of first row if the width of the last row measures less than 50mm.
- LAY FIRST ROW - engage end joints**
Work left to right. Tap to ensure firm lock.
- USE SPACERS AROUND EDGE**
- MEASURE AND CUT**
Note: Use a straight edge to cut the plank several times (with decor facing upwards) then snap for a clean break.
- CHECK ROW IS STRAIGHT**
- USE OFF-CUT FOR NEXT ROW**
Use flooring off-cut to tap on the long side.
- FULLY ENGAGED PANEL JOINTS**
- FIT NEXT PANEL**
Fit into long edge, then slide along and drop down.
- REPEAT FOR ALL PANELS**
Ensure all panels are fully engaged and straight.
- LAST ROW**
Measure width of panel required - cut with knife*
*Ensure expansion gap is maintained.
- CUTTING AROUND PIPEWORK**
Drill holes 12mm larger than pipe diameter.

CARE AND MAINTENANCE

- Clean with a damp mop as needed. Do not use abrasive cleaners, bleach or wax to maintain the floor.
- Do not drag or slide heavy objects across the floor.
- Residential steam mops are allowed but please use at the lowest setting with a suitable soft pad (refer to the manufacturer's instructions for proper usage).
- 15kg max.
- Use proper floor protection devices such as felt protectors under furniture. Do not use mats with a latex or rubber backing as these can cause permanent discoloration.
- Place a walk-off mat at outside entrances to reduce the amount of dirt brought into your home to keep your floors cleaner for longer.

<p>CE</p> <p>Howden Joinery Group Plc 40 Portman Square, London W1A 1LT 53 HU-018-JC</p> <p>EN 15109-2:2008 Resilient floor covering - EN ISO 10562 Reaction to Fire: B_s-S₁ Content of Pentachlorophenol: No Pentachlorophenol containing products added Emission of Formaldehyde: E1 Slip resistance: DS Thermal Conductivity: NPD</p>	<p>UK CA</p> <p>Howden Joinery Group Plc 40 Portman Square, London W1A 1LT 21 H0209-JC</p> <p>EN 14041 : 2004/AC:2006 Reaction to fire (EN 13501-1): B_s-S₁ Formaldehyde emission (EN 717-1) : E1 Slip resistance (EN 13893) : DS Thermal Conductivity : 0.123 W/mK</p>
--	---

Imported in EU by: Howden Coatings SAS, 2.A, Du Bois Rigault Nord, 1 Rue Calmette, 63880 Vendin-le-Vieil, Cedex, France.

OAKE & GRAY
BEAUTIFUL FLOORING IN A SINGLE CLICK

RIGID LUXURY VINYL with underlay

- V-GROOVE WITH PAINTED REBEL
- SUITABLE FOR UNDERFLOOR HEATING
- SUITABLE FOR BATHROOMS AND CONSERVATORIES
- QUICK CLICK, NO GLUE REQUIRED*
- DENT, SCUFF AND STAIN RESISTANT
- TEXTURED SURFACE
- CAN BE USED OVER EXISTING HARD FLOORING*
- INTEGRATED UNDERLAY
- 100% WATERPROOF

*Please refer to full fitting instructions for details.

RIGID LUXURY VINYL with underlay

OAKE & GRAY
BEAUTIFUL FLOORING IN A SINGLE CLICK

OAKE & GRAY

BEAUTIFUL FLOORING IN A SINGLE CLICK



SDH3690
TIMELESS OAK
RIGID LUXURY VINYL
Wear Layer 0.55mm
10 pcs = 2.2 m²

SDH3690

TIMELESS OAK
RIGID LUXURY VINYL
1235 x 178 x 5 mm (incl. 1mm Sound Absorbing Pad)
Wear Layer: 0.55mm
10 pcs = 2.2 m²

