
## **Pre-finished Dordogne Smooth FD30**



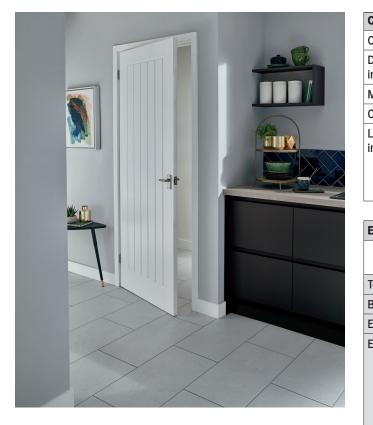

Construction					
Construction	Moulded				
Door construction information	Constructed using softwood timber stile and rail frame				
Material core	Routered Flaxboard Core				
Core material thickness	38 mm				
Lock block additional information	A lock block is not included on this door as it is a solid construction. The lock can be fitted in any location on either side.				

Edging Information							
	Lipping dimensions	Maximum trim					
Тор	6 mm 0 mm						
Bottom	10 mm	6 mm					
Each side	6 mm	4 mm					
Edging additional information	An equal amount of timber should be removed from each side & bottom. Remaining within the parameters of the maximum trim instructions ensures the construction of the door is not compromised and that the door when fitted complies with the fire certificate.						

## **Fitting and finishing**

Please refer to door instructions for all fitting information. For identification, the Howdens logo, SKU code and batch number is on the top edge of the door. All fire doors must be fitted in accordance with the fire certifi-

All fire doors must be fitted in accordance with the fire certificate.



Dimensions									
Product code	Product height	Product width	Product thickness	Product weight	Building regulations	Stile	Top rail	Bottom rail	
DFM7530 Regional <b>UK</b>	2040mm	626mm	44mm	23.163kg	E			185mm	
DFM7540 Regional <b>UK</b>	2040mm	726mm	44mm	27.063kg	E			185mm	
DFM7560 Regional <b>UK</b>	2040mm	826mm	44mm	30.563kg	EM			185mm	
DFM7570 Regional <b>UK</b>	2040mm	926mm	44mm	34.363kg	EM			185mm	
DFM7640 Regional	6'6" / 1981mm	2'3" / 686mm	44mm	25.357kg	E	120mm	117mm	185mm	
DFM7660 Regional <b>UK</b>	6'6" / 1981mm	2'6" / 762mm	44mm	28.183kg	E	120mm	117mm	185mm	
DFM7670 Regional <b>UK</b>	6'6" / 1981mm	2'9" / 838mm	44mm	31.603kg	EM	120mm	117mm	185mm	

## **Key information**

All sizes subject to standard industry tolerances

M = Part M - Mobility and access\*

L = Part L - Warmth & insulation suitable for new build\*

L = Part L - Warmth & insulation suitable for refurbishment projects\*

E = Part E - Reduction of sound travel\*

FD30/60/120 = Certified fire door\*

F = Forest Stewardship Council (FSC®)\*

P = Programme for the Endorsement of Forest Certification schemes (PEFC™)\*

UK = UK Manufactured

+ = Subject to availability

\*Not applicable to all doors, please see the Dimensions table above for products that meet these standards