

External Softwood Door Frames



Assembled Softwood, Opens out (With Hardwood Sill)

- Pre-treated to protect against fungal decay and rot
- Ready for painting
- Supplied assembled with sill

Dimensions		
To Fit Door Width	2'6"	2'9"
Product Code	DFR0217	DFR0216
Building Regulations	F	F
Thickness (mm)	78	78
Weights (kg)	12.6	12.5
Approx Brick Opening Size (mm)	2079 x 856	2079 x 935
A = Total Assembled Width (mm)	850	926
B = Total Assembled Height (mm)	2070	2070
C = Jamb Width (mm)	56	56
D = Head Height (mm)	56	56

All sizes subject to standard industry tolerances

Technical Specification	
Door Stop	13mm, Rebated
Weather Sealant	Weather seal pre-fitted
Assembled/Unassembled	Assembled
Intumescent Strip	N/A
Intumescent Strip Size (mm)	N/A
Core Material	European Redwood
Core Material Grade	5ths or better
Construction	Solid or finger jointed
Moisture Content	12-16%
Fire Certificate	N/A
Sill	Supplied assembled with weather bar

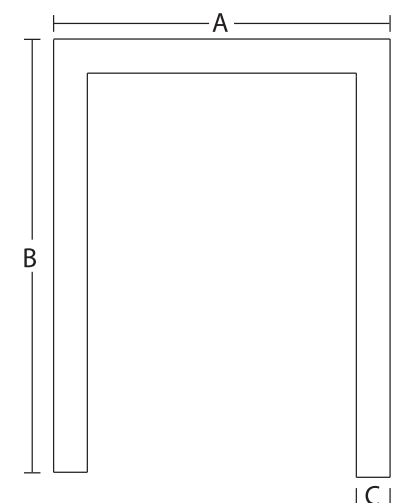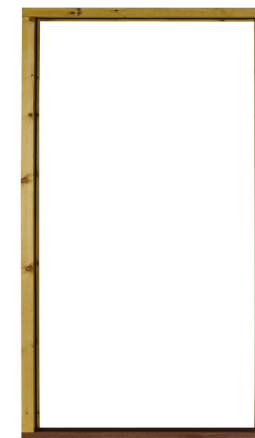

Finger Joints

Finger jointed construction increases the structural stability of timber. A maximum of 20% of all frames will contain finger jointed timber, with the finger joints being visible from either the front or side of the frame Jamb's will have a maximum of 3 finger joints whilst the head will have a maximum of 1 finger joint.

