

Tall Fridge Freezer Towers

Shelf/back panel configurations

LEAFTFRFR

The following information replaces tall fridge/freezer tower configurations shown in the kitchen installation manual. See impacted configurations below (numbers relate to installation manual).

Use this leaflet in conjunction with the kitchen installation manual for all other aspects of cabinet and door installation.





Scan the QR code with your smart device to access a digital copy of the kitchen installation manual




1. Remove the back panel from its transit location at the back of the tower. **Note:** Retain screws for fixing to new location.
2. Position the top shelf to its location, using the dimensions shown below for hole identification.
3. Cut the back panel to size and secure. **Note:** Cut the opposite end of the panel to where screw locations are located.



Back panel rebated sides must locate into cabinet side panel grooves.

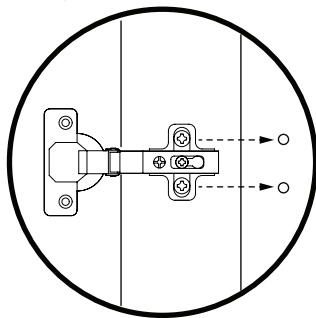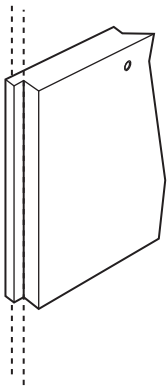

Use the door and fitted hinges to determine the correct hinge plate locations.

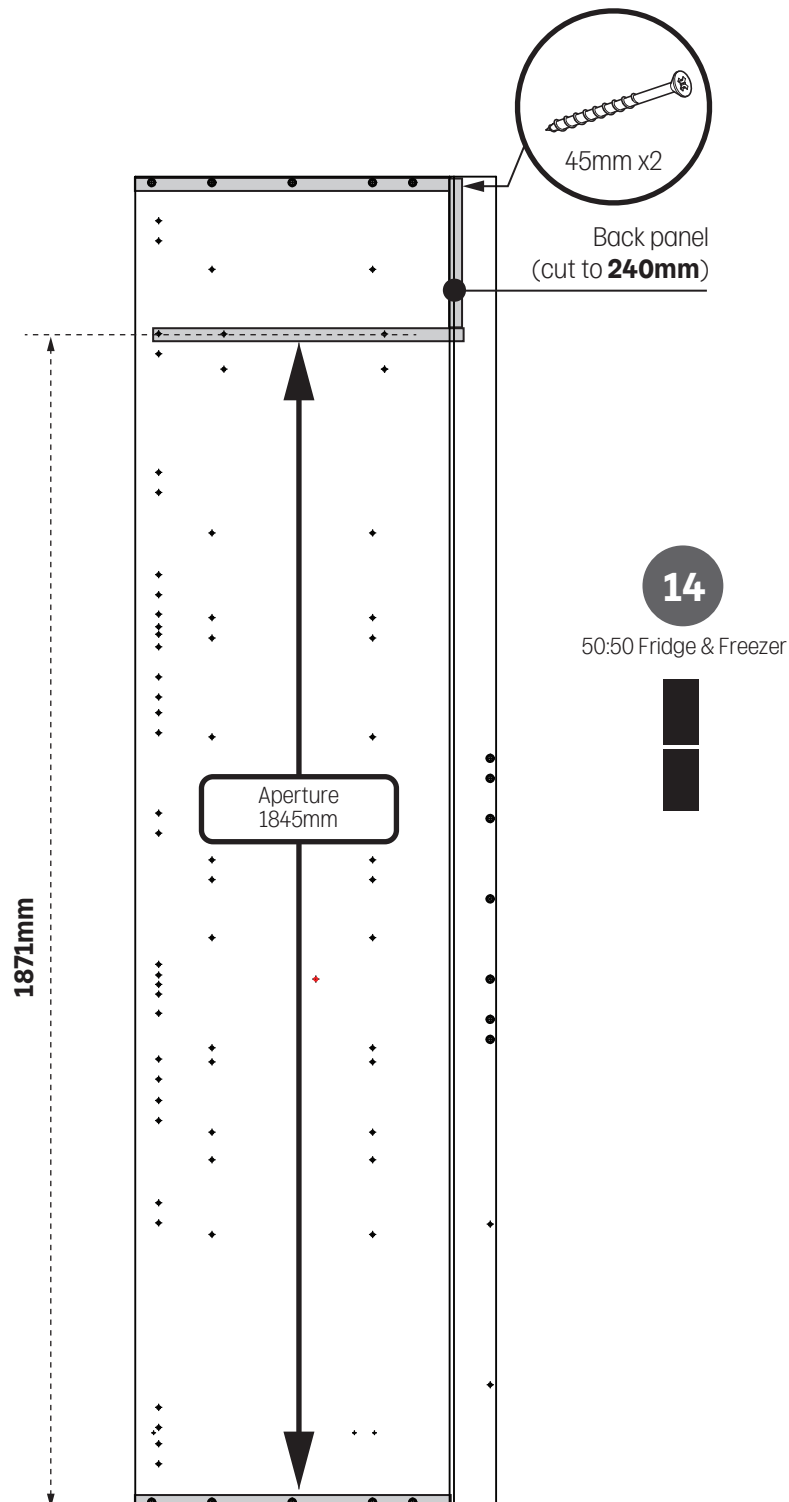

15

70:30
Fridge & Freezer




17c

Larder Fridge
or Freezer




17d




45mm x2

Back panel
(296mm)

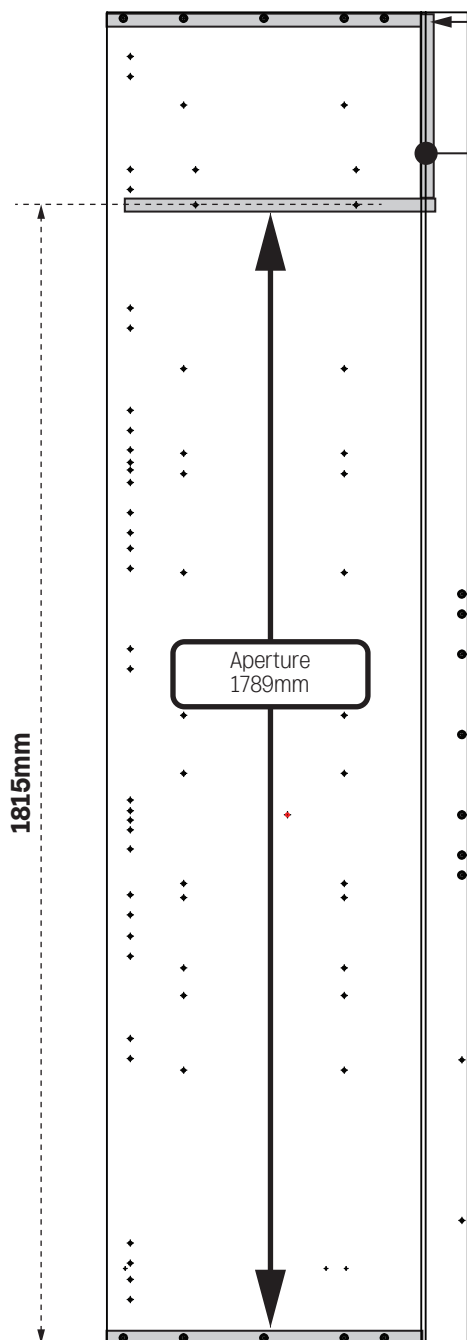

Tall 70:30 fridge & freezer application



45mm x2

Back panel
(cut to 155mm)

