


# Internal Moulded Doors



## DIC45\*\* 2 Panel Smooth

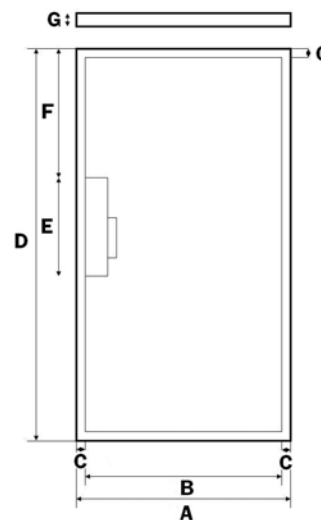

Pre-trim sizes

	Dimensions			
Door Width	2'0"	2'3"	2'6"	2'9"
Product Code	DIC4530	DIC4540	DIC4560	DIC4570
Building Regulations	F	F	F	F, M
Weights (kg)	10.5	11.5	12.5	13.5
Dim A (mm)	610	686	762	838
Dim B (mm)	554	630	706	782
Dim C (mm)	28	28	28	28
Dim D (mm)	1981	1981	1981	1981
Dim E (mm)	360	360	360	360
Dim F (mm)	880	880	880	880
Dim G (mm)	35	35	35	35

Lock Block

1 Particleboard @ 28.3/ 34x65x360

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access

(F) - Forest Stewardship Council



**HOWDENS** JOINERY CO.

MAKING SPACE MORE VALUABLE

# Internal Moulded Doors

## General Construction

---

The smooth surface of the 2 panel door has a versatile finish to suit any property. Create a modern or traditional look by choosing from our variety of handles.

### Construction

Constructed using a whitewood timber stile and rail frame , with a cellular paper core. Assembled using high density moulded fibreboard skins and PVA or UF glue.

### Timber Specification

Timber Species	Softwood
Timber Grade	Softwood sawfalling grade
Moisture Content	8-12%
Moulded Skin	3mm Hardboard
Core	Cellular Paper

Fire Certificate: Not Applicable

Glazing Certificate: Not Applicable

