



Internal Hardwood Doors

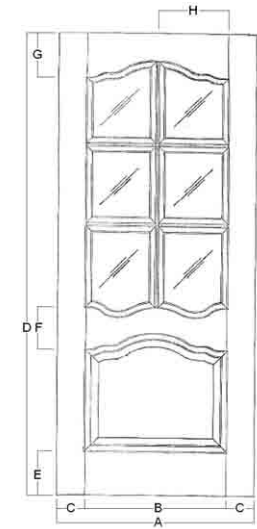

DIE43** Louis Oak 6 Light Glazed

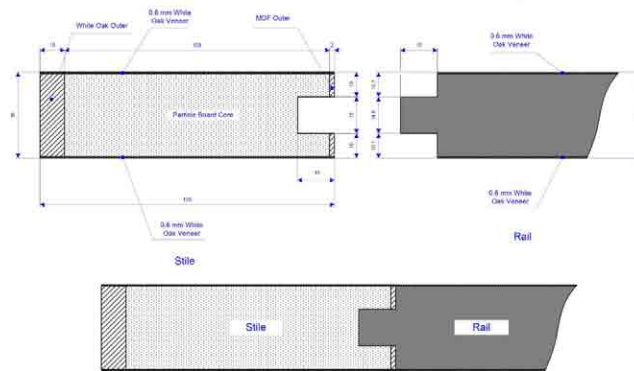

Dimensions			
Door Width	2'3"	2'6"	2'9"
Product Code	DIE4340	DIE4360	DIE4370
Building Regulations			M
Weights (kg)	27.5	28.5	30
Dim A (mm)	686	762	838
Dim B (mm)	446	522	598
Dim C (mm)	120	120	120
Dim D (mm)	1981	1981	1981
Dim E (mm)	185	185	185
Dim F (mm)	210	210	210
Dim G (mm)	190	190	190
Dim H (mm)	215	253	291
Dim I (mm)	265.66	265.66	265.66
Dim J (mm)	335.6	335.6	335.6

All sizes subject to standard industry tolerances

Part M Doors (M) - Mobility and Access



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Hardwood Doors

General Construction

With its distinctive framed window panes and solid oak bolection beadings, this door offers a very traditional look.

Construction

Constructed using veneered particleboard stiles and rails frame.

Supplied pre-glazed with 5mm clear toughened bevelled glass (with paint and peel film).

Timber Specification

Timber Species	American White Oak
Moisture Content	10 - 14%

Lipping

10mm white oak lippings applied on each stile

Maximum Trim

If the door is to be reduced in size, an equal amount of timber should be cut down from either side/top or bottom (please note that this must never exceed 10mm in total, 5mm each side).

Fire Certificate: Not Applicable

Glazing Certificate: Available on request

