


Internal Hardwood Doors



DIE53** 4 Panel Oak Glazed Shaker

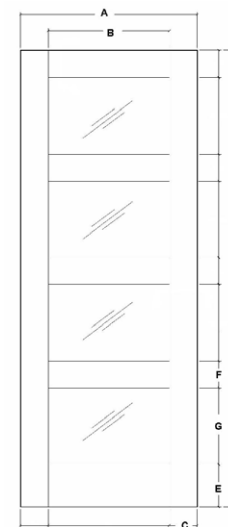

Dimensions		
Door Width	2'6"	2'9"
Product Code	DIE5360	DIE5370
Building Regulations		M
Weights (kg)	24.5	26
Dim A (mm)	762	838
Dim B (mm)	522	598
Dim C (mm)	120	120
Dim D (mm)	1981	1981
Dim E (mm)	185	185
Dim F (mm)	115	115
Dim G (mm)	333.5	333.5

All sizes subject to standard industry tolerances
Part M Doors (M) - Mobility and Access



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

Internal Hardwood Doors

General Construction

This contemporary engineered oak door with 4 glazed panels allows plenty of light without loss of privacy in a room. The glass design has a clear border within each frosted pane.

Construction

Dowels joint and assembled using glue.
Made of veneered particleboard & wooden lipping.
0.6mm American White Oak Veneer.
Pre Glazed with a 4mm toughened glass.

Timber Specification

Timber Species	Kembang Semangkok (KSK)
Moisture Content	10 - 12%

Lipping

10mm hardwood (KSK) lipping applied on each vertical side.

Maximum Trim

If the door is to be reduced in size, an equal amount of timber should be cut down from either side/top or bottom (please note that this must never exceed 10mm in total, 5mm each side).

Fire Certificate: Not Applicable

Glazing Certificate: Available on request

