


# Internal Hardwood Doors



## DIE51\*\* 4 Panel Oak Shaker

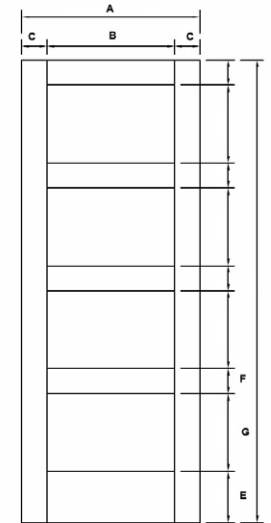

Dimensions				
Door Width	2'0"	2'3"	2'6"	2'9"
Product Code	DIE5130	DIE5140	DIE5160	DIE5170
Building Regulations				M
Weights (kg)	18	20	22	23.5
Dim A (mm)	610	686	762	838
Dim B (mm)	370	446	522	598
Dim C (mm)	120	120	120	120
Dim D (mm)	1981	1981	1981	1981
Dim E (mm)	185	185	185	185
Dim F (mm)	115	115	115	115
Dim G (mm)	333.5	333.5	333.5	333.5

All sizes subject to standard industry tolerances  
Part M Doors (M) - Mobility and Access



**HOWDENS** JOINERY CO.

MAKING SPACE MORE VALUABLE

# Internal Hardwood Doors

## General Construction

---

The simple look of the Shaker Oak door with its flat panels and clean lines suits both modern and classic interiors.

### Construction

Dowels joint and assembled using glue.  
Made of veneered particleboard & wooden lipping.  
0.6mm American White Oak Veneer.

### Timber Specification

Timber Species	Kembang Semangkok (KSK)
Moisture Content	10 - 12%

### Lipping

10mm hardwood (KSK) lipping applied on each vertical stile.

### Maximum Trim

If the door is to be reduced in size, an equal amount of timber should be cut down from either side/top or bottom (please note that this must never exceed 10mm in total, 5mm each side).

Fire Certificate: Not Applicable

Glazing Certificate: Not Applicable

