


# SDH3637 Howdens Real Wood Pre-Finished Fast Fit dark oak 180mm wide

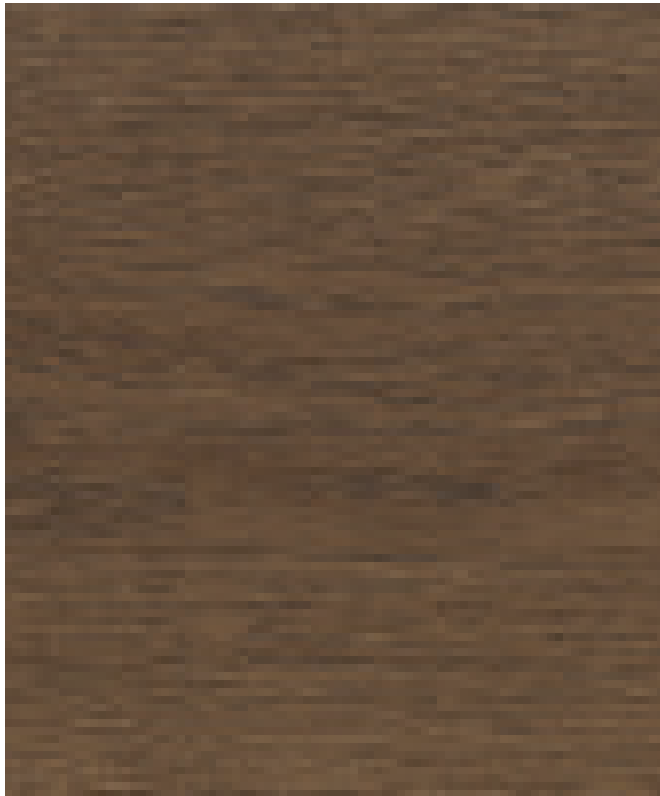

| Associated products            |                          |
|--------------------------------|--------------------------|
| Dark Oak Threshold Strip       | <b>NEW UK</b><br>SDH7820 |
| Dark Oak Ramp Strip            | <b>NEW UK</b><br>SDH7830 |
| Scotia (L2.4m) Scotia          | <b>UK</b> SDH7850        |
| Dark Oak Pipe rose (Pack of 2) | SDH7890                  |

| Construction  |  |
|---------------|--|
| Construction  | Engineered   |
| Surface layer | 2.5mm European Oak Veneer, Universal Grade, Veneer source: European producer |
| Substrate     | Moisture Control HDF - E1 (7.3mm)  |
| Backing       | Spruce - Grade 2/3 (Softwood) (1.2mm)  |

| Technical Information        |                                  |
|------------------------------|----------------------------------|
| Range                        | Engineered Flooring              |
| Flooring format              | Single plank                     |
| Max room dimensions - length | 10 m                             |
| Max room dimensions - width  | 10 m                             |
| Locking system               | Fast Fit Glueless                |
| Finish                       | Matt Lacquered                   |
| Glue / resin                 | Urea - Resin                     |
| Moisture content             | 5% - 9%                          |
| Impact resistance            | >1200mm EN 438-2, 12             |
| Abrasion class               | IP 500 revf. falling sand method |
| Reaction to fire             | Cfl - S1 En Iso 11925-2          |

| Technical Information                 |   |
|---------------------------------------|---|
| Level of use of according to EN13329* | N/A   |
| Thermal conductivity                  | 0.14 W/mK   |
| Effect of castor chairs               | N/A   |
| Resistance to staining                | Resistant DIN 68861, Group A                        |
| Slip resistance                       | 0,5 - 0,7 u   |
| Formaldehyde emission                 | Class E1  |
| Laying detail                         | Must be laid as a floating floor (see instructions) |

| Dimensions & packaging      |                                      |
|-----------------------------|--------------------------------------|
| Product dimensions metric   | W180mm xL2,200mm x D11mm             |
| Product weight              | 21.128kg                             |
| Quantity                    | 6 Full planks or 5 full and 2 halves |
| Product packed dimension    | H66mm x W2,215mm x D195mm            |
| Volume coverage / pack size | 2.38 m/sq                            |
| Product packed weight       | 21.4kg                               |

## Key

**F** = FSC®

**P** = PEFC™

**UK** = UK Manufactured

† = Subject to availability



**HOWDENS** JOINERY CO. MAKING SPACE MORE VALUABLE

Issue Date: 17 November 2017 11:52 AM

The company has a policy of continuous product development and reserves the right to change any products and specifications at any time.